


DUAL-PORT T1/E1 PHYSICAL INTERFACE MODULE

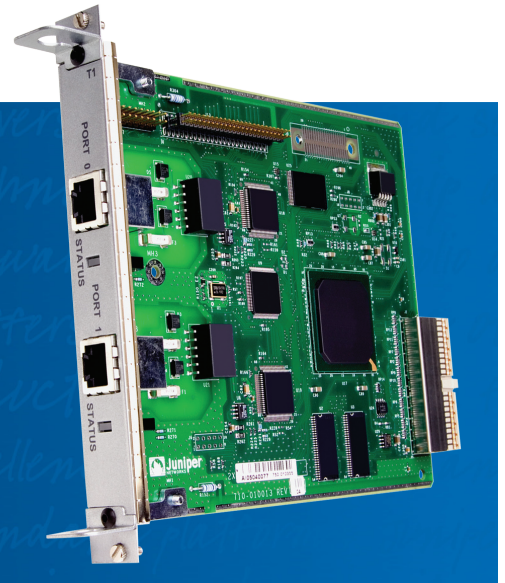

Product Overview

Dual-port T/E1 Physical Interface Module (PIM) are for use with the Juniper Networks J2320, J2350, J4350, and J6350 Services Routers, as well as the Juniper Networks SSG140, SSG320M, SSG350M, SSG520M and SSG550M Secure Services Gateways.

Product Description

The Juniper Networks[®] Dual-port T1/E1 PIM provides the physical connection to T1 or E1 network media types, receiving incoming packets from the network and transmitting outgoing packets to the network. The Dual-port T1/E1 PIM is equipped with a dedicated network processor that forwards incoming data packets to the Routing Engine, and receives outgoing data packets from the Routing Engine. During this process, the PIM performs T1 or E1 framing and line-speed signaling.

When a Dual-port T1/E1 PIM is installed in a ScreenOS-based SSG Series security appliance, the dedicated network processor will forward traffic to the SSG Series CPU where traffic decisions are made based upon security policies.

Features and Benefits

Dual-port T1/E1 PIM provides the following benefits:

- Dual-port form factor allows for increased bandwidth capabilities while making effective use of the J Series and SSG Series modular interface slots.
- Integrated channel service unit/data service unit (CSU/DSU) eliminates the need to deploy a separate external device, saving valuable space and simplifying management.

Features

- Fully integrated CSU/DSU
- Full and fractional T1/E1 capabilities
- Onboard network processor
- 56K and 64K modes support
- ANSI T1.102, T1.107, T1.403 T1 support
- G.703, G.704, and G.706 E1 support
- Independent clock
- Loopback, bit error rate test (BERT), facilities data link (FDL) (T1 only), and long build-out diagnostics

Specifications

Product Specifications

Network Interface Specifications

	DUAL-PORT T1	DUAL-PORT E1
Transmit bit rate	1.544 Mbps	2.048 Mbps
Receive bit rate	1.544 Mbps	2.048 Mbps
Line encoding	- Alternate mark inversion (AMI) - Bipolar with 8-zero substitution (B8ZS) - Framed clear channel - Fractional	- HDB3 - Framed clear channel - Unframed clear channel - Framed fractional
Framing	- Superframe (D4/SF) - Extended superframe (ESF)	- G704 - G704 without CRC4 - Unframed

Data Interface

- Clocking Modes: DCE, internal, loop
- Clocking Rates: 1.2 KHz, 2.4 KHz, 9.6 KHz, 19.2 KHz, 38.4 KHz, 56.0 KHz, 64.0 KHz, 72.0 KHz, 125.0 KHz, 148.0 KHz, 250.0 KHz, 500.0 KHz, 800.0 KHz, 1.0 MHz, 1.3 MHz, 2.0 MHz, 4.0 MHz, 8.0 MHz

Dimensions and Weight (H x W x D)

High-Level Data Link Control (HDLC) Features

- N x 64 Kbps or N x 56 Kbps, non-channelized data rates (T1:N=1 to 24; E1:n=1 to 31)
- Cyclic redundancy check (CRC) 16/32
- Shared flag
- Idle flag/fill
- Counters: runts, giants, frame check sequence (FCS) error, abort error, align error

Interface Connector

- RJ-48

System timing

- Internal (system clock)
- External (network recovered clocks)

Dimensions and Weight (H x W x D)

- 0.63 x 5.45 x 6.5 in (1.6 x 13.8 x 16.5 cm)

Environmental

- Operating temperature: 0 to 40° C
- Storage temperature: -40 to 70° C
- Relative humidity: 5 to 90% noncondensing

Diagnostics

Loopbacks

- Local, remote, payload

Test Patterns (BERT)

- All ones
- All zeros
- Alternating ones and zeros (AA/55)
- 1:3 or 1 in 4 pattern
- 1:7 or 1 in 8 pattern
- 3:24 - 3 bits set in every 24 bits
- QRSS20 (modified PRBS 2²⁰-1, with 14 zero suppression)
- PRBS 2⁷-1
- PRBS 2⁹-1 (as specified in ITU-T 0.153)
- PRBS 2¹¹-1 (as specified in ITU-T 0.153)/2047 pattern
- PRBS 2¹⁵-1 (as specified in ITU-T 0.151/0.153)
- PRBS 2²⁰-1 (as specified in ITU-T 0.153)
- Programmable word or 32-bit programmable pattern

Network Alarms

- Alarm indication signal (AIS)
- Loss of frame (LOF)
- Loss of signal (LOS)
- Yellow (YLW)

Error Counters

- Controlled slipped seconds (CSS or CS)
- Line errored seconds (LES)
- Errored seconds (ES)
- Bursty errored seconds (BES)
- Severely errored seconds (SES)
- Severely errored framing seconds (SEFS)
- LOS seconds
- LOF seconds (LOFS)
- Unavailable seconds (UAS)

LEDs

PIM LEDs indicate port status with the following LED states:

Color	State	Description
Green	On steadily	Online with no alarms or failures.
Red	On steadily	Active with a local alarm; router has detected a failure.

Standards and Compliance

Safety

- CAN/CSA-C22.2 No. 60950/UL 60950 Third Edition, Safety of Information Technology Equipment
- EN 60950 (2000) Third Edition - Safety of Information Technology Equipment

EMC (Emissions)

- FCC Part 15 Class B
- EN 55022 Class B
- AS/NZS 3548 Class B
- VCCI Class B

Immunity

- EN-61000-4-2 ESD
- EN-61000-4-3 Radiated Immunity
- EN-61000-4-4 EFT
- EN-61000-4-5 Surge
- EN-61000-4-6 Low Frequency Common Immunity

European Telecommunications Standardization Institute (ETSI)

- ETSI EN-300386-2: Telecommunication Network Equipment. Electromagnetic Compatibility

Telecom

- FCC Part 68/TIA-968
- IC CS-03

T1 Standards

- ANSI T1.102
- ANSI T1.107
- ANSI T1.403
- Telcordia GR-499-CORE
- ACCUNET TR 62411 (Accunet T1.5)

E1 Standards

- ITU-T G.703
- ITU-T G.704
- ITU-T G.706
- ITU-T G.823
- ITU-T G.826
- CTR 12/13
- ACA TS 016

Performance-Enabling Services and Support

Juniper Networks is the leader in performance-enabling services and support, which are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to bring revenue-generating capabilities online faster so you can realize bigger productivity gains, faster rollouts of new business models and ventures, and greater market reach, while generating higher levels of customer satisfaction. At the same time, Juniper Networks ensures operational excellence by optimizing your network to maintain required levels of performance, reliability, and availability. For more details, please visit www.juniper.net/products-services.

Ordering Information

MODEL NUMBER	DESCRIPTION
JX-2T1-RJ48-S	Dual-port T1 PIM
JX-2E1-RJ48-S	Dual-port E1 PIM

Juniper Networks JUNOS® Software Release

Dual-port T1/E1 PIMs are supported on Juniper Networks J Series routers in JUNOS 7.0 and greater releases.

Juniper Networks ScreenOS Software Release

The Dual-port T1/E1 PIM is supported in ScreenOS 5.1 and higher releases on the SSG500 line, ScreenOS 6.0/r2 and higher releases on the SSG300 line, and ScreenOS 5.4 and higher releases on the SSG140.


About Juniper Networks

Juniper Networks, Inc. is the leader in high-performance networking. Juniper offers a high-performance network infrastructure that creates a responsive and trusted environment for accelerating the deployment of services and applications over a single network. This fuels high-performance businesses. Additional information can be found at www.juniper.net.



Tel North: 0151 2031400 Tel South: 0118 9071600
Email: Info@castleforce.com Web: www.castleforce.com

Copyright 2009 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, JUNOS, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. "Engineered for the network ahead" and JUNOSe are trademarks of Juniper Networks, Inc. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

 Printed on recycled paper.